

ML Series Desiccant Dehumidifier

Complete Dehumidification Package



ML1100

High Efficiency and Reliability

- Desiccant dehumidification – high efficiency, even below 0° C
- Advanced rotor technology – high capacity with economic operating costs
- Internally sealed rotor unit – dehumidifies to low dewpoints
- Hard plastic rotor casing – corrosion resistant construction
- Efficiently designed electrical system – enhanced reliability

Easy Installation and Operation

- Advanced control panel – diagnostic fault display eases maintenance
- Remote display and automatic control – increases installation flexibility
- Humidistat control – optional control of complete unit or reactivation heater only
- Easily removed access panels – fast installation and service
- Replaceable EU3 filter – enhances air quality
- Unit requires minimal floor area – allows installation in confined spaces
- Duct connections conform to ISO 7807 standards – simplifies air duct installation
- Interchangeable front and back panels – optional dry air installation

Product Description

The ML1100 desiccant dehumidifier is designed to efficiently dehumidify in low moisture applications. It is equipped with an internally sealed rotor unit. The rotor casing is constructed of durable thermoset plastic and contains isolated sections that provide a precise balance for dehumidification, reactivation, and heat recovery airflows. Its rugged formed metal frame and access panels are produced from corrosion resistant ALUZINK®.


The electrical control system conforms to EN 60204 (IEC204) standards. The electrical components are mounted on busbars and are constructed of halogen-free plastic. The electrical system is designed for up to 690V and 60° C.

ML Series dehumidifiers conform to both armonised European Standards and to CE marking specifications.

Munters Rotor Technology

The desiccant rotor is manufactured from a corrugated composite material that is highly effective at attracting and holding water vapour. Every Munters dehumidifier applies a unique rotor technology. Airflows, air conditions, rotor sections, and rotor rotation speeds are optimised for specific applications. An innovative control system maximises the units energy efficiency.


A characteristic of the ML Series rotor technology is an extra rotor sector which provides high capacity, while simultaneously recovering heat, thereby effectively reducing the electrical power requirement.

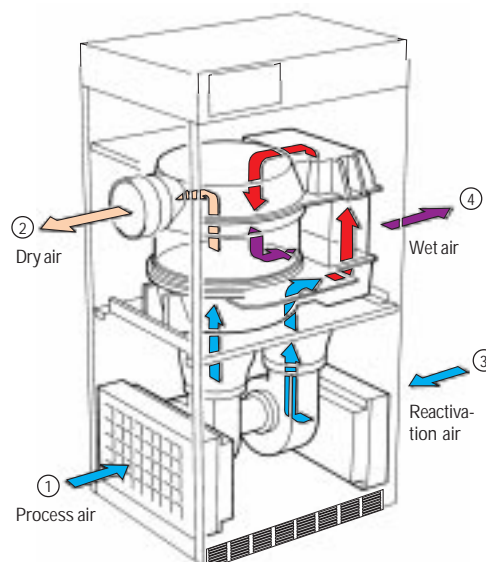

Model ML1100

Diagram measurements are for reference only.

Scaled and dimensioned AutoCAD drawings are available in Munters' DryCap program.

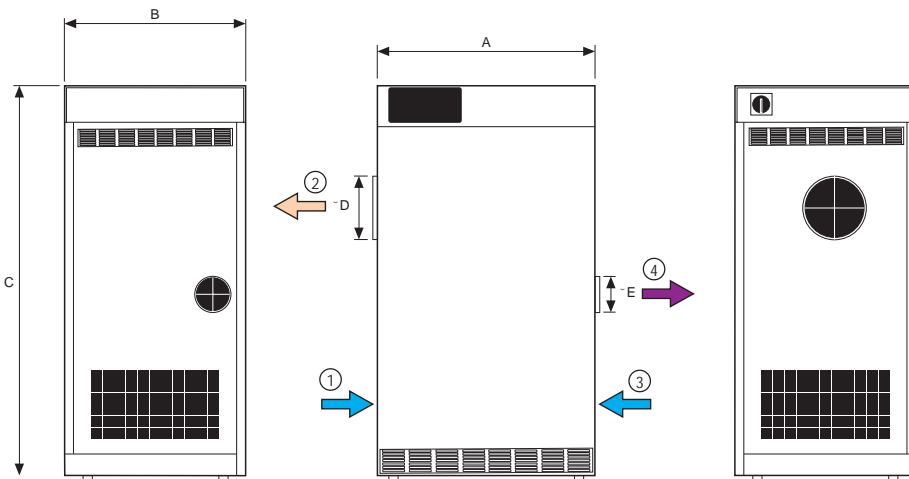


Width (A)	Depth (B)	Height (C)	Diam. (D)	Diam. (E)	Weight
715 mm	590 mm	1452 mm	250 mm	160 mm	153 kg

Dehumidification capacity

Approximate capacity in kg/h. For more detailed information, please contact your nearest Munters location or refer to Munters' DryCap program.

1. Process air temperature, °C
2. Process air relative humidity, % RH
3. Dehumidification capacity, kg/h
moisture removal kg/hour)

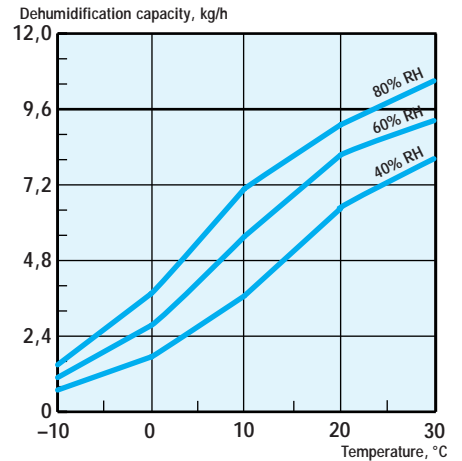

Technical Specifications

Process air¹

Rated airflow (m³/s) _____ 0,305
 Rated airflow (m³/h) _____ 1100
 Available static pressure (Pa) _____ 300
 Fan motor power (kW) _____ 1,1

Reactivation air¹

Rated airflow (m³/s) _____ 0,113
 Nominal airflow (m³/h) _____ 408
 Available static pressure (Pa) _____ 300
 Fan motor power (kW) _____ 0,55

Total power, voltage and current (amps/phase)

Total power (kW) _____ 12,75
 200V 3~50Hz (A) _____ 39,5
 200V 3~60Hz (A) _____ -
 220V 3~50Hz (A) _____ -
 230V 3~50Hz (A) _____ 34,4
 380V 3~50Hz (A) _____ 20,8
 400V 3~50Hz (A) _____ 19,8
 415V 3~50Hz (A) _____ 19,1
 440V 3~60Hz (A) _____ 18,0

Reactivation air heater

Heater power (kW) _____ 11,1
 Temperature increase across heater (°C) _____ 95

Miscellaneous data

Operating temperature (°C) ___ -20/+40
 Drive motor power (W) _____ 10
 Max noise level unducted (dBA) ___ 80
 Air filter, standard _____ EU3
 IEC protective class
 unit _____ IP44
 electrical panel _____ IP54
 Winding insulation grade
 Fan motor _____ Class F
 Drive motor _____ Class F
 High temperature cut-out (°C) ___ 160±5
 Amperage rating
 remote on relay ___ 2A, 250VAC (max)
 alarm contact ___ 2A, 250VAC (max)
 Control voltage _____ 24VAC

Options

- Hours run counter (monitors the number of hours the system is operational)
- Blocked filter alarm
- Rotor stopped alarm
- Humidity control system with alarm and display
Refer to the RH98 product data sheet
- Stainless steel sheet metal casing

¹ Stated performance based on 20°C and air density of 1,2kg/m³



Munters Europe AB
www.munters.com

Munters Europe AB
 Dehumidification Division
 Box 434
 S-191 24 Sollentuna
 SWEDEN
 Tel: +46 8 626 63 00
 Fax: +46 8 626 63 65

Distributor